

Fluke 1735 Power Logger

Performs electrical load studies, energy consumption testing, and general power quality logging

The compact Fluke 1735 Power Logger is easy to set up with its color display and included four flexible current probes. It features a rugged design and enough memory for up to 45 days of recording. In addition to power load studies, the 1735 logs most critical three-phase power parameters, harmonics and it captures voltage events. Saved data can be viewed on screen or you can view graphs and generate reports with the included Fluke Power Log software. Applications include:

- Load studies** – verify electrical system capacity before adding loads
- Energy assessments** – quantify energy consumption before, and after improvements, to justify energy saving devices
- Harmonics measurements** – uncover harmonic issues that can damage or disrupt critical equipment
- Voltage event capture** – monitor for dips and swells that cause spurious resets or nuisance circuit breaker tripping

Log the most common power parameters

Designed to measure the most critical three-phase power parameters, the 1735 can log rms voltage, rms current, phase angle, voltage events, voltage and current THD, voltage and current harmonics up to the 50th, active power, reactive power, power factor, active energy, reactive energy, and more. With memory for up to 45 days of data, the 1735 can uncover intermittent or hard-to-find issues.

Easy to use

The instrument automatically detects and scales included flexible current probes that require no external power or batteries. These variable range current probes are easily set to 15 A, 150 A, or 3000 A for high accuracy in nearly any application. The voltage connections are single leads, enabling safe and quick setups. The color screen provides instant confirmation that connections are correct and then logging begins when you press the RECORD button.




Conduct load studies for up to 45 days and view saved data on-screen or on a computer.

Phase	V _{avg}	V _{rms}	I _{avg}	I _{rms}	PF
L1	3.867	4.052	-1.238		
L2	4.361	4.567	-1.399		
L3	3.108	3.254	-0.998		


Quantify energy consumption quickly on-screen or log to memory for extended periods.



Assess voltage and current harmonics up to the 50th.



Capture voltage events using user-defined thresholds.



View waveforms onscreen to uncover waveform distortion and to verify correct voltage and current connections.




Technical Data



Generate reports and view graphs with Fluke Power Log Software


Designed to quickly view recorded data, the included Power Log software displays all recorded parameters on interactive trends. Generate a professional looking report with 'Report Writer' function or copy and paste images into report document manually.



View recorded data in simple graphs and tables with Fluke Power Log software.



Customize the report generator to easily generate professional looking reports.

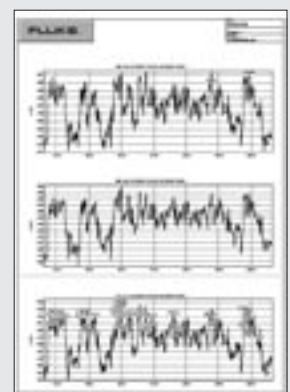

Create professional reports.

Specifications

General

Display	1/4 VGA Graphic Color transmissive displays 320 x 240 Pixel with additional background lighting and adjustable contrast, text and graphics in color
Quality	Developed, designed and manufactured according to DIN ISO 9001
Memory	4 MB Flash memory, 3.5 MB for measuring data
Interface	RS-232 SUB-D socket; 115.2 k Baud, 8 data bits, no parity, 1 stop bit, firmware updates are possible with the RS-232 interface (9-pole extension cable)
Sample rate	10.24 kHz
Line frequency	50 Hz or 60 Hz, user-selectable, with automatic synchronization
Power supply	NiMH battery-pack, with ac adapter (15 V to 20 V/0.8 A)
Operation time with battery	Typical > 12 hours without backlight and > 6 hours with backlight high
Dimensions	240 mm x 180 mm x 110 mm
Weight	1.7 kg, including battery

Ambient conditions

Working temperature range	-10 °C to +50 °C
Storage temperature range	-20 °C to +60 °C
Operating temperature range	0 °C to +40 °C
Reference temperature range	23 °C ± 2 °C

Note: The above terms are defined in European Standards. To calculate the specification at any point in the working temperature range, use the temperature coefficient below.

Temperature coefficient	± 0.1 % of the measured value per °C from the reference
Intrinsic error	Refers to reference temperature, maximum deviation is guaranteed for two years
Operating error	Refers to operating temperature range, maximum deviation is guaranteed for two years
Climatic class	C1 (IEC 654-1) -5 °C to +45 °C, 5% to 95% RH, no dew
Housing	Cyclopol shock and scratch proof thermoplast VO-type (non-flammable) with rubber protection holster

EMC

Emission	IEC/EN 61326-1:1997 class B
Immunity	IEC/EN 61326-1:1997

Safety

Safety	IEC 61010-1 600 V CAT III, double or reinforced insulation, pollution degree 2
Protection	IP65; EN60529 (refers only to the main housing without the battery compartment)

RMS values are measured with a 20 ms resolution.

V-rms wye measurement

Measuring range	57 V/66 V/110 V/120 V/127 V/220 V/230 V/240 V/260 V/277 V/347 V/380 V/400 V/417 V/480 V ac
Intrinsic error	± (0.2% of measured value. + 5 digits)
Operating error	± (0.5% of m. v. + 10 digit)
Resolution	0.1 V

V-rms delta measurement

Measuring range	100 V/115 V/190 V/208 V/220 V/380 V/400 V/415 V/450 V/480 V/600 V/660 V/690 V/720 V/830 V ac
Intrinsic error	± (0.2% of m. v. + 5 digit)
Operating error	± (0.5 % of m. v. + 10 digit)
Resolution	0.1 V

A-rms measurement


Flexi set I ranges	15 A/150 A/3000 A rms (at sine)
Current clamp ranges	1 A/10 A
Resolution	0.01 A
Ranges	150 A/3000 A and 1 A/10 A Intrinsic error: $\pm (0.5 \% \text{ of m. v.} + 10 \text{ digit})$ Operating error: $\pm (1 \% \text{ of m. v.} + 10 \text{ digit})$
Ranges	15 A Intrinsic error: $\pm (0.5 \% \text{ of m. v.} + 20 \text{ digit})$ Operating error: $\pm (1 \% \text{ of m. v.} + 20 \text{ digit})$

The errors of the current probes are not considered.

By using Flexi-Set

Flexi Set measuring error	$\pm (2\% \text{ of m. v.} + 10 \text{ digit})$
Position influence	$\pm (3 \% \text{ of m. v.} + 10 \text{ digit})$
CF (typical)	2.83

Note: When using Flexi Set please make sure to position the conductor opposite to the Flexi Set-lock. Please refer to the figure on the right).



Flexi Set-Lock

Power measurement (P - Active, S - Apparent, Q - Reactive, D - Distorting)

- Measuring range: see V rms and A rms measurement
- Power errors are calculated by adding the errors of voltage and current
- Additional error due to power factor PF
- Specified error x (1-[PF])
- Maximum range with voltage range 830 V delta-connection and 3000 A current range is 2.490 MW, higher displayed values possible when using PTs and CTs with ratio feature

Intrinsic error	$\pm (0.7 \% \text{ of m.v.} + 15 \text{ digit})$
Resolution	1 kW
Operating error	$\pm (1.5 \% \text{ of m.v.} + 20 \text{ digit})$

- Typical range with voltage range 230 V wye connection and 150 A current range is 34.50 KW.

Intrinsic error	$\pm (0.7 \% \text{ of m.v.} + 15 \text{ digit})$
Resolution	1 W to 10 W
Operating error	$\pm (1.5 \% \text{ of m.v.} + 20 \text{ digit})$

The errors of the current sensors themselves have not been considered.

Harmonics

Measuring range	To 50 th harmonic (< 50 % of nom)
------------------------	--

Accuracy

Vm, Im, THDV, THDI	IEC 61000-4-7:2002, Class II
Vm \geq 3% Vn	$\pm 5\% \text{ Vm}$
Vm < 3% Vnom	$\pm 0.15\% \text{ Vnom}$
Im \geq 10% Inom	$\pm 5\% \text{ Im}$
Im < 10% Inom	$\pm 0.5\% \text{ Inom}$
THDV	for THD < 3% $\pm 0.15\%$ at Vnom for THD \geq 3% $\pm 5\%$ at Vnom
THDI	for THD < 10% $\pm 0.5\%$ at Inom for THD \geq 10% $\pm 5\%$ at Inom

Vnom: Normal voltage range

Inom: Nominal current range

Vm and Im are measured values of harmonic m

Energy measurement (kWh, KVAh, kVARh)

Intrinsic error	$\pm (0.7 \% \text{ of m.v.} + \text{F variation error}^* + 15 \text{ digit})$
Resolution	1 W to 10 W
Operating error	$\pm (1.5 \% \text{ of m.v.} + \text{F variation error}^* + 20 \text{ digit})$

*Frequency variation error

PF (Power factor)

Range	0.000 to 1.000
Resolution	0.001
Accuracy	$\pm 1 \% \text{ of full scale}$

Frequency measurement

Measuring range	46 Hz to 54 Hz and 56 Hz to 64 Hz
Intrinsic error	$\pm (0.2 \% \text{ of m. v.} + 5 \text{ digit})$
Operating error	$\pm (0.5 \% \text{ of m. v.} + 10 \text{ digit})$
Resolution	0.01 Hz

Events

Detection of voltage dips, voltage swells and voltage interruptions with a 10 ms resolution and measuring error of the half period sine wave of rms.

Intrinsic error	$\pm (1\% \text{ of m.v.} + 10 \text{ digit})$
Operating error	$\pm (2\% \text{ of m.v.} + 10 \text{ digit})$
Resolution	0.1 V

Ordering Information

Fluke-1735 Power Logger

Includes:

- Soft carrying case
- 4 flexible current probes (15 A/150 A/3000 A)
- Power Log software
- Voltage leads and clips
- Color localization set
- PC interface cable
- International ac adapter (115/230 V, 50/60 Hz)
- Printed English manual
- Multi-language manual CD

Recommended Accessories

- MBX Clamp 1 A/10 A – 3 precision dual range current clamps (1 A/10 A) for secondary CT applications
- C435 – Water-tight hard case with rollers



Fluke. *Keeping your world
up and running.™*

Fluke Corporation

P.O. Box 9090
Everett, WA USA 98206

Fluke Europe B.V.

P.O. Box 1186
5602 BD Eindhoven
The Netherlands

Fluke (UK) Ltd

52 Hurricane Way
Norwich
Norfolk
NR6 6JB
United Kingdom
Tel.: 0207 942 0700
Fax: 0207 942 0701
E-mail: industrial@uk.fluke.nl

Visit us on the world wide web at:
<http://www.fluke.co.uk>

For more information call:

In the U.S.A. (800) 443-5853
or Fax (425) 456-5116
In Europe/M-East/Africa
+31 (0)40 2 675 200
or Fax +31 (0)40 2 675 222
In Canada (905) 890-7600
or Fax (905) 890-6866
From other countries
+1 (425) 456-5500
or Fax +1 (425) 456-5116

Visit us on the world wide web at:
<http://www.fluke.com>

© Copyright 2006 Fluke Corporation.
All rights reserved.
Printed in the Netherlands 05/06
Data subject to alteration without notice.
Pub_ID: 11115-eng